

IPC-B5413PE-IR2



Feature:

High resolution 1.3MP, image presented vivid and clear
 Support automatic color change/IR-CUT,achieving day and night non-stop monitoring
 Support various information superimposed (such as:ID、 IP、 DDNS and so on)
 Advanced video compression, achieving ultra-low bit-rate, superb high-definition picture quality
 support various mobile long-distance monitoring(iOS, Android)
 Support multiple web browsers(IE、 Chrome、 Firefox、 Safari)
 support auto electronic shutter, adapt to different monitoring environment
 web and CMS supporting、 central management software MYEYE, providing SDK development.
 Support HVR/NVR connection, support ONVIF standard


Application:

Apply for road,warehouse,underground parking lot,bar,pipeline and somewhere where require HD images but with dark light and poor sunshine.

Model:

IPC-B5413PE-IR2

Dimension:

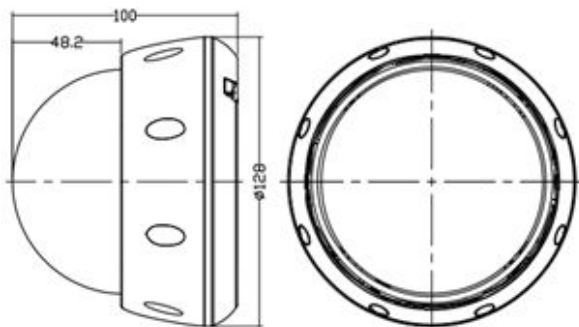

specification:

Model	IPC-B5413PE-IR2
Camera	
Image sensor	1/3" star-light CMOS
Min.illumination	Color 0.0001Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.0001 Lux @ (F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	6mm@F1.8 (3.6mm, 8mm,12mm optional)
Lens mount	CS
Day/night	Support IR-CUT
Compression	
Video compression	H.264,support dual stream,AVI;
Bite rate	32 Kbps~6Mbps
Audio compression	G.711a
Image	
Max.image	1280*960
Frame rate	50Hz:1280*960@20fps,1280*720@25fps 60Hz:1280*960@20fps,1280*720@25fps
Image setting	Saturation, brightness and contrast are adjustable through IE
Network	
Storage	Network storage
Intelligent alarm	Motion detection, video loss, cable break, IP address conflicts
protocol	TCP/IP,HTTP,DHCP,DNS,DDNS, PPPoE,SMTP,NTP
Basic	anti-flicker, dual-stream, heartbeat, password protection
Interface	
Network interface	1*RJ45 10M/100Madaptive ethernet port
General	
Working condition	-10℃~60℃, humidity less than 90%
Power supply	DC12V±10%
IR lamb	IR lamb: 30
IR distance	"IR2" :20-30 meters;
Dimension	Φ 128mm*100mm
Weight	About400g