IPC-EQB8350P-IR3

Feature：

High resolution 5MP, image presented vivid and clear

Support automatic color change/IR-CUT,achieving day and night non-stop monitoring

Support various information superimposed (such as:ID、IP、DDNS and so on)

Advanced video compression, achieving ultra-low bit-rate, superb high-definition picture quality

support various mobile long-distance monitoring(iOS, Android)

Support multiple web browsers(IE、Chrome、Firefox、Safari)

support auto electronic shutter, adapt to different monitoring environment

web and CMS supporting、central management software MYEYE，providing SDK development.

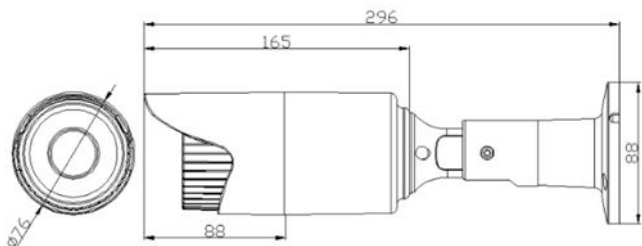Support HVR/NVR connection, support ONVIF standard

Application：

Apply for road,warehouse,underground parking lot,bar,pipeline and somewhere where require HD images but with dark light and poor sunshine.

Model：

IPC-EQB8350P-IR3

Dimension：

specifiction：

Model	IPC-EQB8350P-IR3
Camera	
Image sensor	1/1.8" SONY IMX178 Low illumination CMOS
Min.illumination	Color 0.01Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.001 Lux @ (F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	HD professional lens 3.6-10mm
Lens mount	M14
Day/night	Support IR-CUT
Compression	
Video compression	H.265/H.264,support dual stream,AVI; 1~30f/s variable
Bite rate	32 Kbps~10Mbps
Audio compression	G.711a
Image	
Max.image	2592*1944
Frame rate	50Hz：2592*1944@25fps, 2048*1536@25fps 60Hz：2592*1944@30fps, 2048*1536@25fps
Image setting	Saturation, brightness and contrast are adjustable through IE
Network	
Storage	Network storage
Intelligent alarm	Motion detection, video loss, cable break, IP address conflicts
protocol	TCP/IP,HTTP,DHCP,DNS,DDNS, PPPoE,SMTP,NTP
Basic	anti-flicker, dual-stream, heartbeat, password protection
Interface	
Network inferface	1*RJ45 10M/100Madaptive ethernet port
Audio interface	1ch RCA audio input
General	
Working condition	-10℃~60℃， humidity less than 90%
Power supply	DC12V±10%
Protection range	IP66
IR lamb	10 MIL IR lamb：42
IR distance	"IR3":30-40 meters;
Dimension	Φ76mm*296mm
Weight	About700g