

IPC-HS5110PE-IR3



Feature:


High resolution 720P, image presented vivid and clear
 Support automatic color change/IR-CUT, achieving day and night non-stop monitoring
 Support various information superimposed (such as:ID、IP、 DDNS and so on)
 Advanced video compression, achieving ultra-low bit-rate, superb high-definition picture quality
 support various mobile long-distance monitoring(iOS, Android)
 Support multiple web browsers(IE、 Chrome、 Firefox、 Safari)
 support auto electronic shutter, adapt to different monitoring environment
 web and CMS supporting、 central management software MYEYE, providing SDK development.
 Support HVR/NVR connection, support ONVIF standard

Scenarios:

Apply for road,warehouse,underground parking lot,bar,pipeline and somewhere where require HD images but with dark light and poor sunshine.

Model:

IPC-HS5110PE-IR3

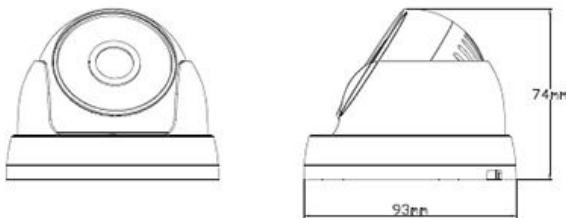

Parameters:

Model	IPC-HS5110PE-IR3
Camera	
Image sensor	1/4" CMOS sensor
Min. illumination	Color 0.1Lux @(F1.2,AGC ON),0 LUX with IR B/W 0.01 Lux @ (F1.2,AGC ON),0 LUX with IR
Shutter	1/50(1/60)s to 1/10,000s
Lens	HD professional lens3.6mm@ F1.8 (6mm option)
Lens mount	M12
Day/night	Support IR-CUT
Compression	
Video compression	H.264 HighProfile, JPEG snapshot
Bite rate	32 Kbps~6Mbps
Image	
Max.image reolution	1280*720
Frame rate	50Hz:25fps (1280×720) 60Hz:25fps (1280*720)
Image setting	Saturation, brightness and contrast are adjustable through IE browser or client software.
Network	
Storage	Network storage
Intelligent alarm	Motion detection, video loss, cable break, IP address conflicts
protocol	TCP/IP,HTTP,DHCP,DNS,DDNS, PPPoE,SMTP,NTP (HTTPS,SIP ,802.1x,IPv6 option)
Basic	anti-flicker, dual-stream, heartbeat, password protection
Interface	
Network interface	1 * RJ45 10M/100M adaptive ethernet port
Audio interface	N/A
General	
Working condition	-10℃~60℃, humidity less than 90% (non-condensing)
Power supply	DC12V±10%
IR distance	"IR3":30-40 meters;
Dimension	∅ 93mm*74mm
Weight	300g