


NBD6908T-PL

Features:

- Support multiple high-definition network camera access;
- Support TV VGA HDMI output simultaneously;
- Support Onvif;
- Supporting web, CMS, center platform management software MYEYE, provide SDK development;
- Supports multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3G,WIFI,IP searches etc.);

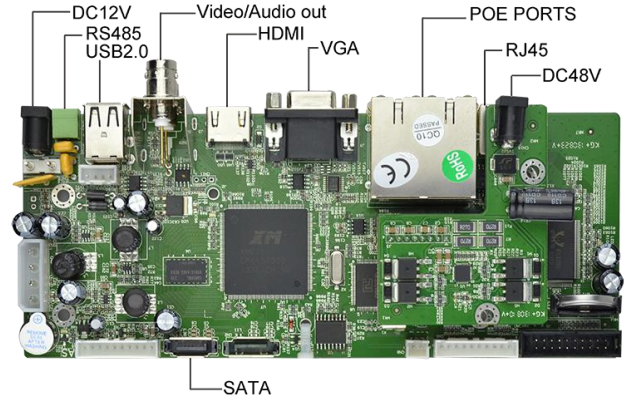

Technical Parameters:

Model: NBD6908T-PL

	Model	NBD6908T-PL
System	Main processor	Hi3520D
	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8
Video	Video input (IP)	8/4*1080P , 8/4*720P
	Video standards	PAL(625TVL,50f/s); NTSC(525TVL,60f/s)
	Video compression	H.264
	Display quality	MAX 1920*1080
	Playback quality	1080P/720P
	Decode	2*1080P real-time
Audio	Motion detection	Support (Depend on camera)
	Audio compression	G.711A
Record & playback	Intercom	Unsupport
	Recording mode	Manual>Alarm>Dynamic Detection>Timing
	Local playback	2*1080P/4*720P
Storage & Backup	Search mode	Search by Time/Calendar/Event/Channel
	Space occupation	Video: CIF 4~5G/day*channel, D1 8~10G/day*channel; 960H 12G~20G/day*channel; 720P 20~30G/day*channel; 1080P ~40G/day*channel; Audio: 691.2M/day*channel
	Record storage	HDD or network
Interface	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video output	1ch BNC(1.0Vp-p,75Ω),1ch VGA,1ch HDMI HD output
	Audio I/O	0/1
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M Adaptive Ethernet port ,4 POE ports Support POE power supply (optional POE module)
	USB interface	2*USB2.0 ports (reserve 2 front ports)
General	HDD	2 SATA(Up to 8TB for each disk)
	PTZ control	Control PTZ device by network
	ONVIF	Support
	Power supply	12V/3A, 48V/1.5A(POE power supply module)
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0℃- +55℃ , Humidity:10%—90%RH , Atm:86kpa—106kp
	Dimension	200mm(H)*80mm(W)
Weight	Around 165g	