


**NBD7004R-FWS**  
4ch 960P NVR WiFi Board

**Feature:**

- Support VGA HDMI output;
- Support ONVIF;access third party;
- Support web, CMS, center platform management software MYEYE, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, IP searches, Alarm Center, etc.);

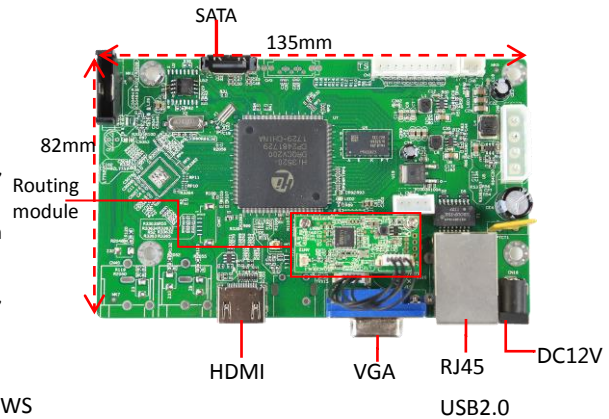

**Parameters:**

Model: NBD7004R-FWS

	Model	NBD7004R-FWS
System	Main processor	Hi3520D
	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4
Video	Video input (IP)	4*960P
	Access bandwidth	24Mbps
	Forwarding bandwidth	24Mbps
	Video compression	H.264
	Display quality	Max 1080P
	Playback quality	960P
	Decode	4*960P
	VR	Unsupport
Audio	Motion detection	Support(depend on camera)
	Audio compression	G.711A
Record & playback	Intercom	Unsupport
	Recording mode	Manual>Alarm>Dynamic Detection>Timing
	Local playback	4*960P
	Search mode	Search by Time/Calendar/Event/Channel
	Record storage	HDD、Network
External interface	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video output	1ch VGA, 1ch HDMI HD output
	Audio I/O	0/0
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M Adaptive Ethernet port+4ch WIFI
	USB interface	1*USB2.0 ports( Reserved 1 pre interface)
	HDD	1* SATA(Up to 8TB for each disk)
	ESATA	No
Serial interface	No	
Other	ONVIF	No
	Power supply	12V/2A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0℃-+55℃ , Humidity:10%—90%RH , Atm:86kpa—106kp
	Dimension	123mm*77mm
	Weight	A total of about 70g