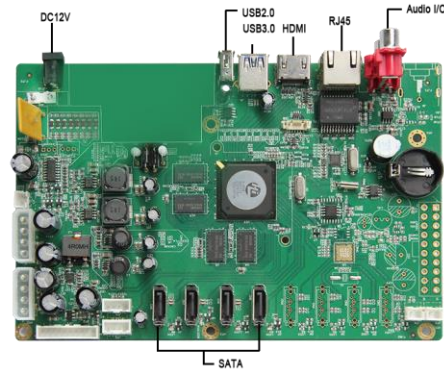


NBD8032H4-P

32ch 5M 4SATA H.265 NVR Board

Features:

- support VGA HDMI 4K output;
- Support web, CMS, center platform management software MYEYE, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, 3G,WIFI,IP searches etc.);
- Visit remotely,built-in ARSP,achieve start up by one step.


Technical Parameters:
Model: NBD8032H4-P

	Model	NBD8032H4-P
System	Main processor	Hi3536
	Operating System	Embedded Linux
	System Resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Operator Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8/16/24/32
Video	Video input (IP)	8*4K/32*5M/16*3M
	Access bandwidth	384Mbps
	Forwarding bandwidth	307Mbps
	Video compression	H.265/H.264
	Display quality	Max:4K
	Playback quality	4K/5M/3M
	Decode	2*4K/4*5M/8*3M
	VR	unsupport
Audio	Motion detection	Depend on camera
	Audio compression	G.711A
Record & playback	intercom	Support
	Recording mode	Manual>Alarm>Video Detection>Continuous
	Local Playback	2*4K/4*5M/8*3M
Storage &	Search mode	search by Time/calendar/event/channel
	Record Storage	HDD 、 network
Interface	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video output	1ch HDMI ,1ch VGA output
	Audio I/O	1/1
	Alarm I/O	No (Can customized 16/4 alarm i/o)
	Network interface	1*RJ45 10M/100M /1000MAdaptive Ethernet port
	USB interface	1*USB2.0 port,1*USB3.0 port (Reserved 2 pre interface)
other	Hard disk	4*SATA(Up to 8TB for each disk)
	PTZ control	Control PTZ device by network
	ONVIF	Support
	Power supply	12V/6A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0℃-+55℃ , Humidity:10%—90%RH , Atm:86kpa—106kp
	dimension	192.5mm(H)*127mm(W)
weight	Around 220g	