

NVR6808T-PL




**Features:**

- Support multiple high-definition network camera access; up to 1080P
- Support VGA, HDMI 1080P full HD output simultaneously;
- Support web, CMS, MYEYE platform, provide SDK development;
- Support multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, IP searches, Alarm Center, etc.);
- Support ONVIF & GB28181;
- Support several mobile system (iOS, Android);
- Support multiple web browser access (IE, Chrome, Firefox, Safari);
- More than twenty languages;
- Perfect protection circuit, unique triple watchdog function;
- Visit remotely, built-in ARSP, remote monitoring by one step

**Model:**

**NVR6808T-PL**

**Interface:**

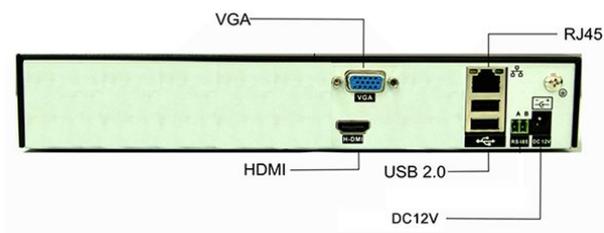

**Parameters:**

	Model	NVR6808T-PL
System	Main processor	Hi3520D
	Operating system	Embedded Linux
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8
Audio & video	Video input	8、4*1080P/8、4*720P
	Decode	H.264
	Display quality	Max 1920*1080
	Playback quality	1080P/720P
	Standard	Video: PAL, NTSC; Audio: G.711A
	Motion detection	Support (depend on camera)
Video playback	Intercom	Unsupport
	Record mode	Manual>Alarm>Dynamic
	Local playback	2*1080P; 4*720P
	Search mode	Search by time/calendar/event/channel
	Record storage	HDD, Network
External interface	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
	Video out	1ch VGA, 1ch HDMI
	Audio I/O	0/0
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M adaptive Ethernet port
	PTZ control	Control PTZ by network
	USB interface	2*USB2.0 ports
HDD	1*SATA (Max 6T for each)	
General	ONVIF	Support
	GB28181	Optional
	Work environment	Temperature: 0°C - +55°C, Humidity: 10% - 90%RH, Atm: 86kpa - 106kpa
	Weight	Around 1KG
	Power supply	12V/3A
	Dimension	255(L)*236mm(W)*44mm(H)