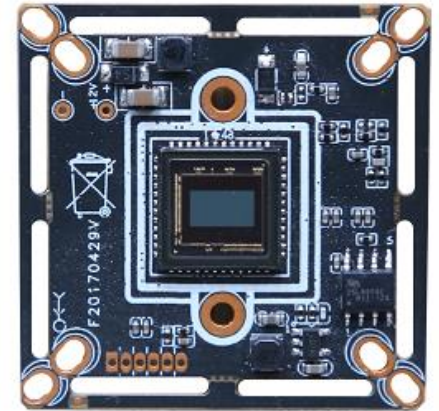


**XAG-50X10PT-M**

720P Three in One Analog Video Camera Module

**Key features:**

- 720P high resolution, the image is more clear and delicate;
- Zero-latency data transmission, full real-time, high fidelity;
- Long transmission distance, coaxial transmission up to 500 meters;
- Support UTC, enable OSD by the back-end;
- Support coaxial upgrade, version upgrade convenient and efficient;
- Compatible with AHD/TVI/CVI backend;
- Support XVI, image quality is better;
- NTSC&PAL 2 in 1, easy to switch through back-end;
- High-definition quality products with competitive price.


**Model:**

XAG-50X10PT-M

**Parameters:**

Specifications	XAG-50X10PT-M
ISP	XM330
Sensor	1/4 inch H62 sensor
Signal format	XVI/TVI/CVI
Video Resolution	PAL/NTSC :1280*720
Minimum Illumination	color: 0.1Lux@ (F1.2, AGC ON) , 0Lux with IR
	Black & White: 0.01Lux@ (F1.2, AGC ON) , 0Lux with IR
Photosensitive Resistance	1 photosensitive resistance interface, support the photosensitive resistor input signal and image, IR-CUT, infrared lamp linkage
Shutter	1/50(1/60) seconds to 1/10,000 seconds
Day and Night Function	Support IR-CUT
Lens Parameters	C/CS interface, M12 lens optional
Video output	720P@25fps
Power	DC12V±10%
Temperature and Humidity	- 10 °C ~ 60 °C, humidity is less than 90% (no condensation)
Consumption	<5W
Size	Standard 32*32 positioning hole, compatible with 38*38 hole
Remarks	Support UTC, coaxial upgrade