

## JF-NVR7816R-F




### Features:

- support multiple high-definition network camera access;
- support VGA, HDMI 1080P full HD output simultaneously;
- supporting web, CMS, MYEYE platform, provide SDK development;
- supports multiple cloud technology, network penetration, alarm information pushed to your phone and other functions;
- support multiple network services (support DHCP, FTP, DNS, DDNS, NTP, UPNP, EMAIL, IP searches, Alarm Center, etc.);
- support ONVIF ;
- support several mobile system (iOS, Android);
- supports multiple web browser access (IE, Chrome, Firefox, Safari);
- more than twenty languages;
- perfect protection circuit, unique triple watchdog function;

### Model:

**JF-NVR7816R-F**

### Interface:

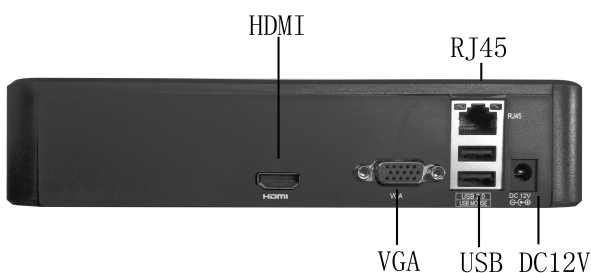

### Parameters:

	Model	NVR7816R-F
System	Main processor	Hi3535
	Operating system	Embedded Linux
Interface	Operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/8/16
Audio&video	Standard	Video: PAL, NTSC; Audio: G.711a
	Decode	H.264
	Monitor quality	MAX: 1920*1080
	Playback quality	5M/1080P/960P
	Video input	4*5M/8*1080P/16*960P
	Motion detection	Depend on camera
	Intercom	Unsupport
Record & Backup	Record mode	Manual>Alarm>Dynamic Detection>Timing Detection>Timing
	Local playback	1*5M/4*1080P/4*960P
	Search mode	Ssearch by time/calendar/event/channel
	Record storage	HDD, network
	Backup mode	Network backup, USB hard disk, USB burner, SATA burner
External interface	Video out	1ch VGA, 1ch HDMI
	Loop vout	Unsupport
	Audio I/O	0/0
	Alarm I/O	0/0
	Network interface	1*RJ45 10M/100M, Adaptive Ethernet port
	PTZ control	PTZ control via network equipment
	USB	2*USB2.0 ports
	HDD	1 SATA (up to 6TB for each disk)
General	ONVIF	support
	GB28181	Unsupport
	Humidity	0°C-+55°C 10%-90%RH
	Weight	Around 0.6KG
	Power supply	12V/2A
	Dimension	210mm (L)* 200mm(W)* 49mm(H)